
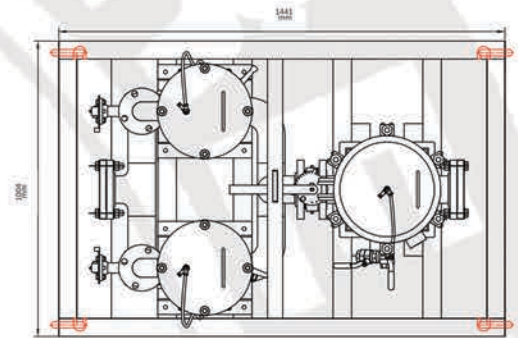
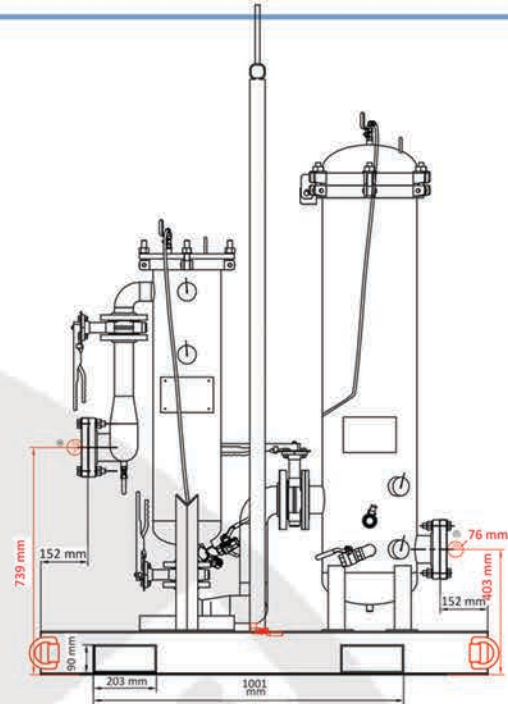


# The PF750L Particulate Filter Unit

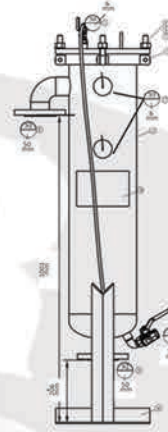

## Overview:

The PF750L particulate filter features one cartridge filter tank and two bag filter tanks. It utilises 12 open-ended cartridges and 178 x 762 mm bag filters for superior filtration from 100 to 0.5 microns for flows up to 750 L/min.

## Features and Benefits:

- One cartridge filter tank holds 12 open-ended cartridges
- One bag filter tank for 178 x 762 mm bag filter
- Utilises 64 x 1016 mm open ended cartridges from 100 to 0.5 microns
- Chambers and piping constructed of stainless steel
- No moving parts
- Bag filter chamber and cartridge filter chamber connect in series
- Units fitted with bleed valves and pressure gauges
- Initial pressure drop is less than 5 psi/0.34 bar at 750 L/min
- System can stand alone for sediment removal or be used in combination with media vessels
- ASME and CE certified
- Manufactured in a ISO9001 certified manufacturing facility

## Accessories:

- Spillguard
- Suction and discharge hoses

Max Flow	750 L/min
Material	stainless steel
Max Pressure	125 psi / 8.62 bar
Dry Weight	682 kg
Footprint	1004mm x 1441mm
Inlet / outlet	3" x 3" flange



0845 900 2841  
rainforrent.co.uk